




# CARDKEY 2

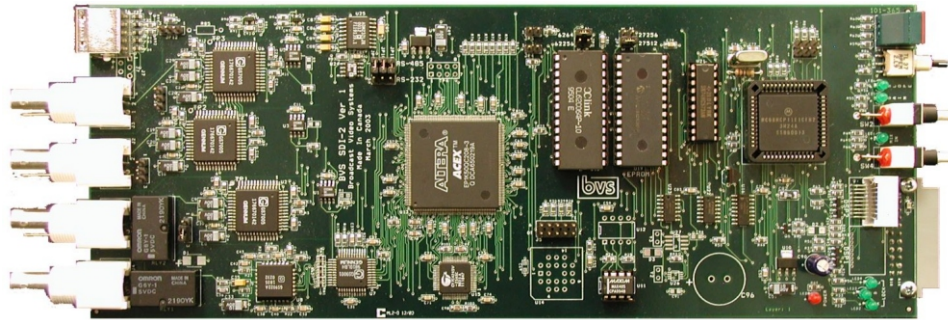

## LINEAR SDI KEYS ON A SINGLE BOARD

- 100% linear keying with adjustable transparency
- 525/625 line operation (NTSC/PAL), automatically selected
- Front card edge controls for transparency adjust and mix to key rate
- Card edge numeric readout of transparency settings with non-volatile memory
- Remote key on/off pushbutton included
- Alternate or latching GPI for key on/off with tally output
- Frame accurate key dissolve (0 to 100 frames)
- Unique auto timing system allows for three layer keys
- Failsafe bypass
- Handles embedded audio
- EDH insertion on program output
- RS232/485 communications port
- Occupies one of 3 slots in a BVS FR601, 1RU frame
- Optional rack mount or desktop remote panel



## SPECIFICATIONS

Video input (pgm, key, fill).....	SMPTE 259M (ITU-R 601) 270 Mbs, 10 bit, SDI
Connector.....	BNC, 75 ohm
Level.....	800 mV, +/-10%
Return loss.....	> 15 dB, 5 MHz to 270 MHz
Auto input equalization.....	up to 160 meters (500 ft.) Belden 8281
Line standard.....	525/625, auto select
Processing.....	12 bit
Video output.....	800 mV, 10 bit SDI, 75 ohm BNC
GPI's.....	momentary or latching, pull to ground
Electrical.....	120/240 VAC, 50/60 Hz, 5 watts (FR601 frame & 1 PC board)
Board dimensions.....	4" x 10.5"
Mechanical.....	1 Rack Unit (1.75" x 19" x 12"), houses any 3 SDI boards
Optional remote.....	1RU or 5"x7" slope front desktop

**broadcast video systems corp.**

10 Woltner Way, Markham, Ontario L3R 4R4

Ph(905)305-0565 Fax(416)946-1964 E-mail: [bvs@bvs.ca](mailto:bvs@bvs.ca) Website: [www.bvs.ca](http://www.bvs.ca)



## FR601 FAMILY OF SDI BOARDS

---



The FR601 family includes a variety of innovative and cost effective SDI products, all designed as single, plug-in boards. Up to three of these boards may be housed in the FR601, 1RU frame and power supply (optional redundant p.s. available).

**CARDKEY 2:** Linear keyer with adjustable transparency, card edge control plus GPI, or optional remote panel.

**MASTERKEY CK-2:** Chroma keyer with adjustable hue and key level, for blue and green screen backgrounds.

**DFB200:** Frame accurate fade to black with GPI.

**VBI-232D:** Encoder/decoder for transmission of remote control data in the Vertical Ancillary Space.

**DCB-21:** Closed Captioning positioner/bridge prevents previously encoded captions from blocking local road/weather warnings and EAS crawls. Also bridges CC data around 'unfriendly' processing equipment.

**CCA-21:** Closed Captioning alarm, constantly monitors SDI program video to ensure valid closed captioning.

**DSC300:** Signal comparator and alarm, to compare two SDI streams and trigger GPO's on any difference or impairment of video or embedded audio.

**DMA200:** Frame accurate A/B mix amp with GPI.

**CC-101D:** Closed Captioning encoder encodes CC data on line 21 of an SDI signal.

**VC-1D:** V-Chip rating encoder generates & inserts program rating data onto line 21 of an SDI signal.

---

## **broadcast video systems corp.**

10 Woltner Way, Markham, Ontario L3R 4R4

Ph(905)305-0565 Fax(416)946-1964 E-mail: [bvs@bvs.ca](mailto:bvs@bvs.ca) Website: [www.bvs.ca](http://www.bvs.ca)